



Series 8.5868, 8.5888


Key-Features:

- Solid shaft: maximum diameter 10 mm
- Blind hollow shaft: maximum diameter 15 mm
- Housing diameter 58 mm
- Interfaces: CANopen® and CANopen-Lift
- Protection class up to IP67
- Total resolution up to 28 Bit
- Maximum revolution speed 9000 turns/min
- Temperature range -40...+80°C



Content:

Order Code Solid Shaft	2
Order Code Blind Hollow Shaft	3
Technical Data	4
CANopen Interface	5
Connection	6
Technical drawing	7

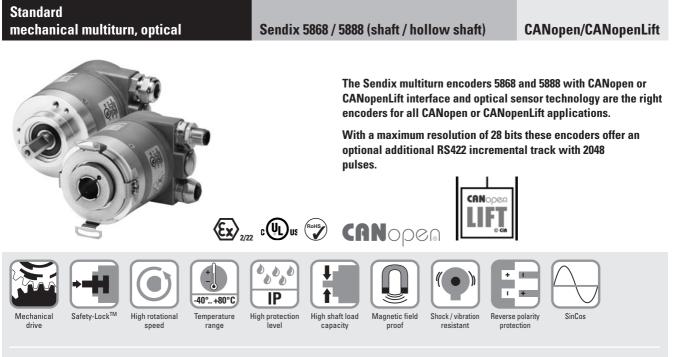


- 2 -

Reliable

- Tried-and-tested in applications with the highest demands, such as in mobile automation or medical technology.
- Ideal for use outdoors thanks to IP67 protection and wide temperature range from -40°C up to +80°C.

Flexible

- Node address can be set via rotary switches or software.
- Baud rate and termination can be set via DIP switches or software.
- With bus terminal cover or fixed connection, as well as M12 connectors or cable connection.
- Universal scaling function.

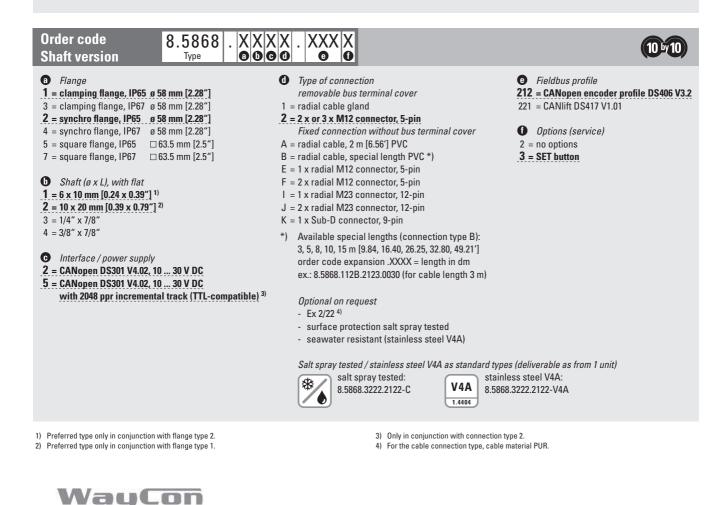

Absolute encoders – multiturn

Standard mechanical multiturn, optical Order code 8 5888 XXX	Sendix 5868 / 5888 (shaft / hollow sha	aft)	CANopen/CANopenLift
Order code 8.5888 . XXX Hollow shaft Type			
 Flange Flange = with spring element, long, IP65 = with stator coupling, IP65 ø 65 mm [2.56"] = with stator coupling, IP65 ø 65 mm [2.48"] = with stator coupling, IP65 ø 63 mm [2.48"] = with stator coupling, IP67 ø 63 mm [2.48"] Blind hollow shaft		212 = C 221 = C 1 Opt 2 = no C 3 = SET	able as from 1 unit) V4A:
Connection technology			Order no.
Cordset, pre-assembled	M12 female connector with coupling nut for bus in, 2 m [16.40']	5-pin	K5P2M-B-M12-CAN

M12 male connector with external thread for bus out, 5-pin 2 m [16.40']

K5P2M-S-M12-CAN

Only in conjunction with connection type 2.
 For the cable connection type, cable material PUR.



- 3 -

mechanical multiturn, optical

Sendix 5868 / 5888 (shaft / hollow shaft)

Resolution singleturn

Number of revolutions (multiturn)

CANopen/CANopenLift

1 ... 65536 (16 bit), scalable

scalable only via the total resolution

default: 8192 (13 bit)

max. 4096 (12 bit)

Technical data

Mechanical characteristics	
Maximum speed	
IP65 up to 70°C [158°F] IP65 up to T _{max} IP67 up to 70°C [158°F] IP67 up to T _{max}	9000 min ⁻¹ , 7000 min ⁻¹ (continuous) 7000 min ⁻¹ , 4000 min ⁻¹ (continuous) 8000 min ⁻¹ , 6000 min ⁻¹ (continuous) 6000 min ⁻¹ , 3000 min ⁻¹ (continuous)
Starting torque - at 20°C [68°F] IP65 IP67	< 0.01 Nm < 0.05 Nm
Mass moment of inertia	
shaft version hollow shaft version	4.0 x 10 ⁻⁶ kgm ² 7.5 x 10 ⁻⁶ kgm ²
Load capacity of shaft radial axial	80 N 40 N
Weight with bus terminal cover with fixed connection	approx. 0.57 kg [20.11 oz] approx. 0.52 kg [18.34 oz]
Protection acc. to EN 60529	
housing side shaft side	IP67 IP65, opt. IP67
Working temperature range	-40°C +80°C [-40°F +176°F] ¹⁾
Material shaft/hollow shaft flange housing cable	stainless steel aluminum zinc die-cast PVC (PUR for Ex 2/22)
Shock resistance acc. to EN 60068-2-27	2500 m/s², 6 ms
Vibration resistance acc. to EN 60068-2-6	100 m/s², 55 2000 Hz

Total resolution	1 268.435.456 (28 bit), scalable default: 33.554.432 (25 bit)
Code	binary
Interface	CAN high-speed acc. to ISO 11898, Basic- and Full-CAN CAN specification 2.0 B
Protocol	CANopen profile DS406 V3.2 with manufacturer-specific add-ons or CANlift profile DS417 V1.1
Baud rate	10 1000 kbit/s can be set via DIP switches, software configurable
Node address	1 127 can be set via rotary switches, software configurable
Termination switchable	can be set via DIP switches, software configurable
Incremental track characteristics	
Output driver	BS/22 (TTL-compatible)

Interface characteristics CANopen/CANopenLift

Electrical characteristics	
Power supply	10 30 V DC
Power consumption (no load)	max. 100 mA
Reverse polarity protection of the power supply	yes
UL approval	file 224618
CE compliant acc. to	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU

Incremental track characteris	STICS	
Output driver		RS422 (TTL-compatible)
Permissible load / channel		max. +/- 20 mA
	IGH .0W	typ. 3.8 V typ. 1.3 V
Short circuit proof outputs		yes ²⁾
Resolution		2048 ppr

SET button (zero or defined value, option)

Protection against accidental activation. Button can only be operated with a ball-pen or pencil.

Diagnostic LED (yellow)

LED is ON with the following fault conditions

Sensor error (internal code or LED error) too low voltage, over-temperature

1) Cable version: -30°C ... +75°C [-22°F ... +167°F].

2) Short circuit to 0 V or to output, only one channel at a time, power supply correctly applied.



- 4 -

Standard multiturn, optical

Sendix 5868 / 5888 (shaft / hollow shaft)

CANopen/CANopenLift

General information about CANopen / CANopenLift

The CANopen encoders support the latest CANopen communication profile according to DS301 V4.02. In addition, device specific profiles such as encoder profile DS406 V3.2 and DS417 V1.1 (for lift applications) are available

The following operating modes may be selected: Polled Mode, Cyclic Mode, Sync Mode. Moreover, scale factors, preset values, limit switch values and many other additional parameters can be programmed via the CAN bus.

When switching the device on, all parameters are loaded from an EEPROM, where they were saved previously to protect them against power-failure.

The following output values may be combined in a freely variable way as PDO (PDO mapping): position, speed, acceleration as well as the status of the working area.

As competitively priced alternatives, encoders are also available with a connector or a cable connection, where the device address and baud rate can be changed and configured by means of the software. The models with bus terminal cover and integrated T-coupler allow for extremely simple installation: the bus and power supply can be easily connected via M12 connectors. The device address can be set via 2 rotary hex switches. Furthermore, another DIP switch allows for the setting of the baud rate and switching on a termination resistor. Three LEDs located on the back indicate the operating or fault status of the CAN bus, as well as the status of an internal diagnostic.

Universal Scaling Function

At the end of the physical resolution of an encoder, **when scaling is active**, an error appears if the division of the physical limit (GP_U) by the programmed total resolution (TMR) does not produce an integer.

The Universal Scaling Function remedies this problem.

CANopen communication profile DS301 V4.02

Among others, the following functionality is integrated.

- · Class C2 functionality.
- NMT slave.
- Heartbeat protocol.
- High resolution sync protocol.
- Identity object.
- Error behavior object.
 Variable PDO mapping.
- Self-start programmable (power on to operational).
- Sensitivity programmable (power on to operational)
 3 Sending PDO's.
- Node address, baud rate and CANbus.
- Programmable termination.

CANopen Encoder Profile DS406 V3.2

The following parameters can be programmed:

- Event mode.
- Units for speed selectable (steps/sec or min⁻¹).
- Factor for speed calculation (e.g. circumference of measuring wheel).
- Integration time for the speed value from 1 ... 32.
- 2 working areas with 2 upper and lower limits and the
 - corresponding output states.
- Variable PDO mapping for position, speed, work area status.
- Extended failure management for position sensing with integrated temperature control.
- User interface with visual display of bus and failure status 3 LED's.
- Optional 32 CAMs programmable.
- Customer-specific memory 16 Bytes.

CANopen Lift Profile DS417 V1.1

Among others, the following functionality is integrated:

- Car position unit.
- 2 virtual devices.
- 1 virtual device delivers the position in absolute measuring steps (steps).
- 1 virtual device delivers the position as an absolute travel information in mm.
- Lift number programmable.
- Independent setting of the node address in relation with the CAN identifier.
- · Factor for speed calculation (e.g. measuring wheel periphery).
- Integration time for speed value of 1...32.
- 2 work areas with 2 upper and lower limits and the corresponding
- output states.Variable PDO mapping for position, speed, acceleration, work area status.
- Extended failure management for position sensing with integrated temperature control.
- User interface with visual display of bus and failure status 3 LED's.
 - "Watchdog controlled" device.

All profiles stated here: Key-features

The object 6003h "Preset" is assigned to an integrated key, accessible from the outside.



- 5 -

Standard mechanical multiturn, optical

Sendix 5868 / 5888 (shaft / hollow shaft)

CANopen/CANopenLift

Terminal assignment

Interface	Type of connection	Cable gland (bu	s terminal c	over with te	rminal box)						
			Bus OUT							Bus IN		
2, 5	1	Signal:	CAN_GND	CAN_L	CAN_H	0 V power supply	+V power supply	0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND
		Abbreviation:	CG	CL	СН	0 V	+V	0 V	+V	CL	СН	CG
Interface	Type of connection	Cable (isolate u	nused wires	individually	y before init	tial start-up)					
					Bus IN							
2, 5	А, В	Signal:	0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND					
		Cable color:	WH	BN	YE	GN	GY					
Interface	Type of connection	2 x M12 connec	tor, 5-pin (3	x M12 conr	nector with	interface 5)					
					Bus OUT				2	4	1	
		Signal:	0 V power supply	+V power supply	CAN_L	CAN_H)	CAN_GND				-4	
2, 5	2, F	Pin:	3	2	5	4	1		5		3	
2, 3	۷,۱				Bus IN		1		2		1	
		Signal:	0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND		3-			
		Pin:	3	2	5	4	1		4		5	
					remental tr	1			1	A	2	
5	2	Signal:	A	Ā	В	B	0 V		-		-3	
		Pin:	1	2	3	4	5		4		5	
Interface	Type of connection	1 x M12 connec	tor. 5-nin									
intorrado					Bus IN				2		1	
2, 5	E	Signal:	0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND		3-		, I	
		Pin:	3	2	5	4	1		4		5	
Interface	Type of connection	2 x M23 connec	tor. 12-pin									
	.,,,				Bus OUT							
		Signal:	0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND		(/	1 9 8	$\langle \rangle$	
2 5		Pin:	10	12	2	7	3			•••		
2, 5	J				Bus IN			2	x ((3•	10 12]]	
		Signal:	0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND			4.5.6	//	
		Pin:	10	12	2	7	3					
Interface	Type of connection	1 x M23 connec	tor. 12-nin									
	7,				Bus IN							
2, 5	I	Signal:	0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND					
		Pin:	10	12	2	7	3	$\begin{bmatrix} \circ & 10 & 12 & \bullet \\ 3 & 4 & 11 & 6 \\ 4 & 5 & \bullet \end{bmatrix}$))		
Interface	Type of connection	Sub-D connecto	or, 9-pin									
					Bus IN					2 3 4	5	
2, 5	К	Signal:	0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND			۰ ۰ ۰ ۰ ۰ ۴ ۰ ۶ ۹ ۹)	
		Pin:	6	9	2	7	3					



mechanical multiturn, optical

Fit

h7

f7

h7

h7

Sendix 5868 / 5888 (shaft / hollow shaft)

CANopen/CANopenLift

Dimensions shaft version, with removable bus terminal cover Dimensions in mm [inch]

L

7/8"

7/8"

Clamping flange, ø 58 [2.28]

Flange type 1 and 3 (drawing with 2 x M12 connector)

1 3 x M3, 6 [0.24] deep

2 3 x M4, 8 [0.32] deep


D


6 [0.24]

10 [0.39]

1/4"


3/8"

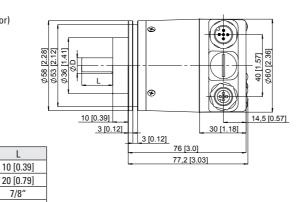



Synchro flange, ø 58 [2.28] Flange type 2 and 4 (drawing with cable)

1 3 x M4, 6 [0.24] deep




1 51,5 [2.03] Bus in 3× 120° Bus out Ø42 [1,65]


D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"


Square flange, 🗌 63.5 [2.5]

Flange type 5 and 7

(drawing with cable)







Ø31,75 h7[1,25]

mechanical multiturn, optical

Sendix 5868 / 5888 (shaft / hollow shaft)


CANopen/CANopenLift


Dimensions shaft version, with fixed connection Dimensions in mm [inch]

Synchro flange, ø 58 [2.28] Flange type 2 and 4

(drawing with M23 connector)

1 3 x M4, 6 [0.24] deep







Fit	L
h7	10 [0.39]
f7	20 [0.79]
h7	7/8"
h7	7/8"
	h7 f7

Synchro flange, ø 58 [2.28] Flange type 2 and 4 (drawing with Sub-D connector)

1 3 x M4, 6 [0.24] deep 2 2 x 4/40 UNC; 3.0 [0.12] deep







D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

Square flange, 63.5 [2.5] Flange type 5 and 7

(drawing with 2 x M23 connector)





D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"



Standard mechanical multit

mechanical multiturn, optical


Sendix 5868 / 5888 (shaft / hollow shaft)


CANopen/CANopenLift

Dimensions shaft version, with fixed connection Dimensions in mm [inch]

Clamping flange, ø 58 [2.28] Flange type 1 and 3 (drawing with 1 x M12 connector)

1 3 x M3, 6 [0.24] deep 2 3 x M4, 8 [0.32] deep

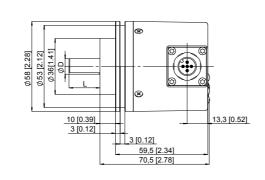





D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

Synchro flange, ø 58 [2.28] Flange type 2 and 4 (drawing with M12 connector)

1 3 x M4, 8 [0.32] deep







D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

Clamping flange, ø 58 [2.28] Flange type 1 and 3 (drawing with cable)

1 3 x M3, 6 [0.24] deep 2 3 x M4, 8 [0.32] deep

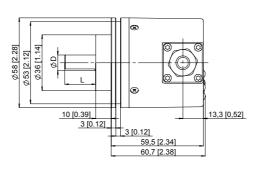



D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"



- 9 -

Standard <u>mechanical multit</u>urn, optical

Sendix 5868 / 5888 (shaft / hollow shaft)

CANopen/CANopenLift

Dimensions hollow shaft version (blind hollow shaft), with removable bus terminal cover Dimensions in mm [inch]

Flange with spring element, long

Flange type 1 and 2 (drawing with 2 x M12 connector)

- 1 Slot spring element recommendation: cylindrical pin DIN 7, ø 4 [0.16]
- 2 3 x M3, 5.5 [0.22] deep
- Recommended torque for the clamping ring 0.6 Nm

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]
L = insertion depth max. blind hollow shaft		

Flange with stator coupling, ø 63 [2.48] Flange type 5 and 6

Pitch circle diameter for fixing screws 63 [2.48] (drawing with cable)

1 Recommended torque for the clamping ring 0.6 Nm

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]
L = insertion depth max. blind hollow shaft		

Flange with stator coupling, ø 65 [2.56] Flange type 3 and 4

Pitch circle diameter for fixing screws 65 [2.56] (drawing with 2x M12 connector)

1 Recommended torque for the clamping ring 0.6 Nm

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]
I - insertion depth max, blind bollow shaft		

L = insertion depth max. blind hollow shaft


au


i a n s m e

on.

stechni


L 30 [1.18] 30 [1.18] 30 [1.18] 30 [1.18] 30 [1.18] 30 [1.18] 30 [1.18] 30 [1.18] 4 [0.16] 84[3,32] 92[3,63] 92[3,63]







Ø65 [2.56]


Bus out







14,5[0,57]



mechanical multiturn, optical

Sendix 5868 / 5888 (shaft / hollow shaft)

CANopen/CANopenLift

Dimensions hollow shaft version (blind hollow shaft), with fixed connection Dimensions in mm [inch]

Flange with spring element, long Flange type 1 and 2

(drawing with M23 connector)

- Slot spring element recommendation: cylindrical pin DIN 7, ø 4 [0.16]
- 2 3 x M3, 5.5 [0.22] deep
- 3 Recommended torque for the clamping ring 0.6 Nm

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]
L = insertion depth max. blind hollow shaft		

Flange with spring element, long Flange type 1 and 2

(drawing with Sub-D connector)

- 1 Slot spring element recommendation: cylindrical pin DIN 7, ø 4 [0.16]
- 2 3 x M3, 5.5 [0.22] deep
- 3 2 x 4/40 UNC; 3.0 [0.12] deep
- 4 Recommended torque for the clamping ring 0.6 Nm

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]
L = insertion depth max. blind hollow shaft		


Flange with stator coupling, ø 65 [2.56] Flange type 3 and 4


Pitch circle diameter for fixing screws 65 [2.56] (drawing with 2 x M23 connector)


1 Recommended torque for the clamping ring 0.6 Nm


D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]
L = insertion depth max. blind hollow shaft		

















Standard mechanical multiturn, optical

Sendix 5868 / 5888 (shaft / hollow shaft)

CANopen/CANopenLift

Dimensions hollow shaft version (blind hollow shaft), with fixed connection Dimensions in mm [inch]

Flange with stator coupling, ø 63 [2.48]

Flange type 5 and 6 Pitch circle diameter for fixing screws 63 [2.48] (drawing with M12 connector)

1 Recommended torque for the clamping ring 0.6 Nm

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]
L = insertion depth max. blind hollow shaft		

Flange with spring element, long

Flange type 1 and 2

(drawing with 2 x M12 connector)

- 1 Slot spring element recommendation: cylindrical pin DIN 7, ø 4 [0.16]
- 2 3 x M3, 5.5 [0.22] deep
- 3 Recommended torque for the clamping ring 0.6 Nm


	D	Fit	L
10) [0.39]	H7	30 [1.18]
12	2 [0.47]	H7	30 [1.18]
14	4 [0.55]	H7	30 [1.18]
15	5 [0.59]	H7	30 [1.18]
	3/8"	H7	30 [1.18]
	1/2"	H7	30 [1.18]
L = ir	L = insertion depth max. blind hollow shaft		


Flange with stator coupling, ø 65 [2.56] Flange type 3 and 4


Pitch circle diameter for fixing screws 65 [2.56] (drawing with cable)


1 Recommended torque for the


clamping ring 0.6 Nm		
D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]
L = insertion depth max. blind hollow shaft		












Head Office

Mehlbeerenstr. 4

82024 Taufkirchen

Tel. +49 (0)89 67 97 13-0

Fax +49 (0)89 67 97 13-250



Subject to change without prior notice.

Office Köln

Auf der Pehle 1 50321 Brühl Tel. +49 (0)2232 56 79 44 Fax +49 (0)2232 56 79 45

WayCon Positionsmesstechnik GmbH email: info@waycon.de internet: www.waycon.biz

